## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization

International Bureau



# | 19310 193200 1 19310 13011 13011 13011 13011 13011 1311 1311 1311 1311 1311 1311 1311 1311 1311 1311 1311 13

### (43) International Publication Date 1 April 2004 (01.04.2004)

## **PCT**

# (10) International Publication Number WO 2004/026500 A3

(51) International Patent Classification<sup>7</sup>: 43/10

E21B 23/00,

(21) International Application Number:

PCT/US2003/025675

(22) International Filing Date: 18 August 2003 (18.08.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/412.544

20 September 2002 (20.09.2002) US

(71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]: 16200 A. Park Row, Houston, TX 77084 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): SHUSTER, Mark

[US/US]: 19115 Prospect Ridge Lane, Houston, TX 77094 (US). RING, Lev [US/US]: 14126 Heatherhill Place, Houston, TX 77077 (US).

- (74) Agent: MATTINGLY, Todd; Haynes and Boone, LLP, Suite 3100, 901 Main Street, Dallas, TX 75202 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO.

[Continued on next page]

(54) Title: SELF-LUBRICATING EXPANSION MANDREL FOR EXPANDABLE TUBULAR

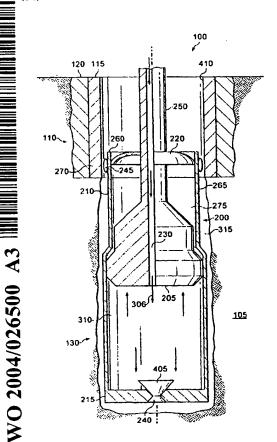

(57) Abstract: A self-lubricating expansion mandrel (205) includes a system for lubricating the interface between the self-lubricating expansion mandrel (205) and a tubular member (210) during the radial expansion of the tubular member (210).

# WO 2004/026500 A3

SE, Sl, SK, TR), OAPI patent (BF, BJ, CF, CG, Cl, CM, (88) Date of publication of the international search report: GA. GN. GQ. GW. ML. MR. NE, SN. TD, TG).

#### Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

#### Published:

with international search report

13 January 2005

# (15) Information about Correction:

**Previous Correction:** 

see PCT Gazette No. 43/2004 of 21 October 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## INTERNATIONAL SEARCH REPORT

International application No.

C A	CCLET CLETY ON OR COMPANY		PCT/US03/25675	5		
A. CLASSIFICATION OF SUBJECT MATTER  IPC(7) : E21B 23/00, 43/10						
IPC(7) : E21B 23/00, 43/10 US CL : 166/207, 55,7						
According to International Patent Classification (IPC) or to both national classification and IPC						
B. FIELDS SEARCHED						
Minimum documentation searched (classification system followed by classification symbols)						
U.S.: 166/207, 55.7, 50, 55, 55.1, 205, 209, 216, 242.1, 297, 380, 384						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched						
and the second and the second and second						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)						
Please See Continuation Sheet						
C. DOCUMENTS CONSIDERED TO BE RELEVANT						
Category *	Citation of document, with indication, where a	ppropriate, of the relev	vant passages	Relevant to claim No.		
X	US 2002/0062956 A1 (MURRAY et al.) 30 May 2	002 (30.5.2002), whole	e document	1-9		
	, , , , ,		document	1-7		
Y				10-23		
Υ,	US 5,014,779 A (MELING et al) 14 May 1991 (14	1.05.1991), column 3, I	ines 31-36	19-23		
**	110 4 50 5 000 1 57 7					
Y	US 4,526,839 A(HERMAN et al) 2 July 1985 (02.	.07.1985), column 5, line 60- column 6, 10-18, 23				
Α	line 16. US 6,325,148 B1 (TRAHAN et al) 4 December 2001, (04.12.2001), whole document					
Α	US 0,323,148 B1 (1KAHAN et ai) 4 December 20	01, (04.12.2001), whol	e document	1-23		
Α	US 3,203,451 A(VINCENT) 31 August 1965 (31.08.1965), whole document.		1.00			
	55 5,265,451 A(VINCERVI) 51 August 1965 (51.66.1965), Whole document.		ent.	1-23		
Α	US 6,158,963 A (HOLLIS et al) 12 December 200	0 (12.12.2000), whole	document.	1-23		
	, , ,	(1212212000), 112020	oo o dambaa	1-25		
Α	US 4,505,987 A (YAMADA et al.) 19 March 1985	(19.03.1985), whole d	locument.	1-23		
			I			
			[			
Further	documents are listed in the continuation of Box C.	See patent f	amily annex.			
* S <sub>j</sub>	pecial categories of cited documents:	"I" later document	published after the inten	national filing date or priority		
"A" document	defining the general state of the art which is not considered to be	date and not in	conflict with the applications underlying the inven-	tion but cited to understand the		
	ar relevance			į.		
"E" carlier ap	plication or patent published on or after the international filing date	"X" document of pa	articular relevance; the c	laimed invention cannot be		
			ment is taken alone	at to involve an inventive step		
	which may throw doubts on priority claim(s) or which is cited to be publication date of another citation or other special reason (as	"Y" document of na	artimilar releannes: the e	laimed invention cannot be		
specified)	as position and of distinct statutes of original special factors (as		nvolve an inventive step			
"O" document	referring to an oral disclosure, use, exhibition or other means		one or more other such to a person skilled in the	documents, such combination		
			-			
	published prior to the international filing date but later than the	"&" document men	iber of the same patent fa	mily		
Pare of the St	ctual completion of the international search	pare or maning of the	9 K M	ก็∨ีวกักส		
11 December 2003 (11.12.2003) <b>25 MAY 200</b> 4						
Name and mailing address of the ISA/US  Althorized officer						
	Stop PCT, Attn: ISA/US	David I Rabnell	Party Party			
	missioner for Patents . Box 1450	David J. Dakheli				
Alex	candria, Virginia 22313-1450	Telephone No. (703)	308-1113	İ		
Facsimile No. (703) 305-3230						

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT	PCT/US03/25675			
·				
Continuation of B. FIELDS SEARCHED Item 3: JPO, EPO, Derwent				
Terms: swedge/swage, lubricate/lubricant, teflon, friction, coating,				
Form PCT/ISA/210 (second sheet) (July 1998)				

#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 1 April 2004 (01.04.2004)

PCI

(10) International Publication Number WO 2004/026500 A3

(51) International Patent Classification<sup>7</sup>: 43/10

E21B 23/00,

(21) International Application Number:

PCT/US2003/025675

(22) International Filing Date: 18 August 2003 (18.08.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/412,544

20 September 2002 (20.09.2002) U

(71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A. Park Row, Houston, TX 77084 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): SHUSTER, Mark

[US/US]; 19115 Prospect Ridge Lanc, Houston, TX 77094 (US). **RING, Lev** [US/US]; 14126 Heatherhill Place, Houston, TX 77077 (US).

- (74) Agent: MATTINGLY, Todd; Haynes and Boone, LLP, Suite 3100, 901 Main Street, Dallas, TX 75202 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, HL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH. GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SELF-LUBRICATING EXPANSION MANDREL FOR EXPANDABLE TUBULAR

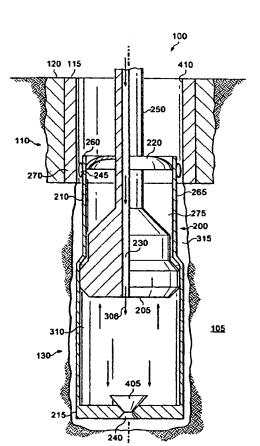

(57) Abstract: A self-lubricating expansion mandrel (205) includes a system for lubricating the interface between the self-lubricating expansion mandrel (205) and a tubular member (210) during the radial expansion of the tubular member (210).

WO 2004/026500 A3 |||||||||

#### WO 2004/026500 A3

SE, SI, SK. TR), OAPI patent (BF, BJ, CF, CG, CI, CM, Date of public GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

#### Published:

- with international search report
- with amended claims

(88) Date of publication of the international search report:

13 January 2005

of the amended claims: 24 February 2005

(15) Informat. about Correction:

**Previous Correction:** 

see PCT Gazette No. 43/2004 of 21 October 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## AMENDED CLAIMS

[received by the International Bureau on 23 July 2004 (23.07.2004); claims 24-47 added

- 17. The self-lubricating expansion mandrel of claim 12, wherein the solid lubricant retained in the plurality of troughs formed in a textured pattern comprises a thermo-sprayed coating.
- 18. The self-lubricating expansion mandrel of claim 12, wherein the depth of the plurality of troughs formed in a textured pattern is in a range of between about 50 and 150 microns.
- 19. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and a grease supply chamber in the housing; a conduit from the grease supply chamber to one or more of the grooves; and means for forcing grease from the grease supply chamber trough the conduit to one or more of the grooves.
- 20. The self-lubricating expansion mandrel of claim 19, wherein the one or more grooves comprise circumferential grooves.
- The self-lubricating expansion mandrel of claim 19, wherein the grooves comprise axial grooves.
- 22. The self-lubricating expansion mandrel of claim 19, wherein the grooves comprise a pattern of grooves with both an axial and a circumferential component.
- 23. The self-lubricating expansion mandrel of claim 22, wherein the pattern of grooves comprises a textured surface.
- 24. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the grooves comprise circumferential grooves.
- 25. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the grooves comprise axial grooves.
- 26. A self-lubricating expansion mandrel for expanding a tubular member, comprising:
  a housing including a tapered outer surface;
  one or more grooves formed in the tapered outer surface; and
  solid lubricant retained in one or more of the grooves;
  wherein the grooves comprise a pattern of grooves with both an axial and a circumferential component.
- 27. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapexed outer surface; and

WO 2004/026500 PCT/US2003/025675

solid lubricant retained in one or more of the grooves; wherein the pattern of grooves comprises a textured surface.

- 28. A self-hubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 1 and 4 microns.
- 29. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 10 and 50 microns.
- 30. A self-lubricating expansion mandrel for expanding a tubular member, comprising:
  a housing including a tapered outer surface;
  one or more grooves formed in the tapered outer surface; and
  solid lubricant retained in one or more of the grooves;
  wherein the solid lubricant retained in one or more of the grooves comprises a thermo-sprayed coating.
- 31. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 50 and 150 microns.
- 32. A self-lubricating expansion device for expanding a tubular member, comprising:
  a housing including a tapered outer surface;
  one or more depressions formed in the tapered outer surface; and
  a lubricant supply chamber in the housing;
  a conduit from the lubricant supply chamber to one or more of the depressions; and
  means for forcing lubricant from the lubricant supply chamber trough the conduit to one or more of the
  depressions.
- 33. The self-lubricating expansion mandrel of claim 32, wherein the one or more depressions comprise circumferential grooves.
- 34. The self-hibricating expansion mandrel of claim 32, wherein the depressions comprise axial grooves.
- 35. The self-lubricating expansion mandrel of claim 32, wherein the depressions comprise a pattern of grooves with both an axial and a circumferential component.

WO 2004/026500 PCT/US2003/025675

36. The self-lubricating expansion mandrel of claim 35, wherein the pattern of grooves comprises a textured surface.

- 37. A self-lubricating expansion device for expanding a tubular member, wherein the interface between the expansion device and the tubular member, during the expansion process, includes a leading edge portion and a trailing edge portion, comprising:
- a housing including a tapered outer surface;
- one or more first depressions formed in the leading edge portion of the tapered outer surface; and a lubricant supply chamber in the housing;
- a conduit from the lubricant supply chamber to one or more of the first depressions;

means for forcing lubricant from the lubricant supply chamber trough the conduit to one or more of the depressions;

one or more second depressions formed in the trailing edge portion of the tapered outer surface; and a solid lubricant provided within one or more of the second depressions.

- 38. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise circumferential grooves.
- 39. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise axial grooves.
- 40. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise a pattern of grooves with both an axial and a circumferential component.
- 41. The self-lubricating expansion mandrel of claim 40, wherein the pattern of grooves comprises a textured surface.
- 42. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

injecting a fluid lubricant into the leading edge portion; and providing a solid lubricant in the trailing edge portion.

43. A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for injecting a fluid lubricant into the leading edge portion; and means for providing a solid lubricant in the trailing edge portion.

44. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the

WO 2004/026500 PCT/US2003/025675

expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

providing a supply of a fluid lubricant within the expansion device; and injecting the fluid lubricant into the leading edge portion.

45. A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for providing a supply of a fluid lubricant within the expansion device; and means for injecting the fluid lubricant into the leading edge portion.

46. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

providing a supply of a solid lubricant on the expansion device within the trailing edge portion.

47. A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for providing a supply of a solid lubricant on the expansion device within the trailing edge portion.

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:			
☐ BLACK BORDERS			
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES			
FADED TEXT OR DRAWING			
BLURRED OR ILLEGIBLE TEXT OR DRAWING			
☐ SKEWED/SLANTED IMAGES			
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS			
☐ GRAY SCALE DOCUMENTS			
LINES OR MARKS ON ORIGINAL DOCUMENT			
REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY			

# IMAGES ARE BEST AVAILABLE COPY.

OTHER: \_\_\_\_\_

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.